

Installation Requirements

Slayer Espresso Single Group

Dimensions

- Width: 570 mm / 22.4 in
- Depth: 605 mm (705 mm with portafilter)
23.8 in (27.7 in with portafilter)
- Height: 400 mm / 15.7 in
- Weight: 49 kg / 108 lbs (tanks filled)

Water

- 3/8-inch BSP dedicated cold water line with shutoff valve (in North America, 3/8-inch compression fitting is included)
- Required incoming water pressure:
3 Bar min, 5 Bar max
- Water hardness cannot exceed 50ppm, otherwise a water softener is needed




Power

	Euro 1Φ	US/CAN 1Φ
V/f	220-240 V 50-60Hz	120Vac 60Hz
Input	2.1-2.4 kW	1.5 kW

Standard grounded plug end included (US/CAN only)

Drain

- Open gravity drain located within 4 feet / 1.2 meters of the machine.
- Ensure drain line is always sloping downwards
- Drain hose: 7/8 inch outside diameter, 5/8 inch inside diameter (2.2 cm outside diameter, 1.6 cm inside diameter).

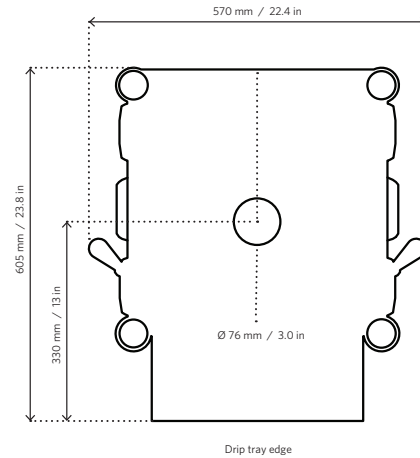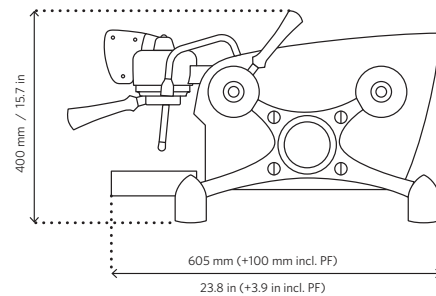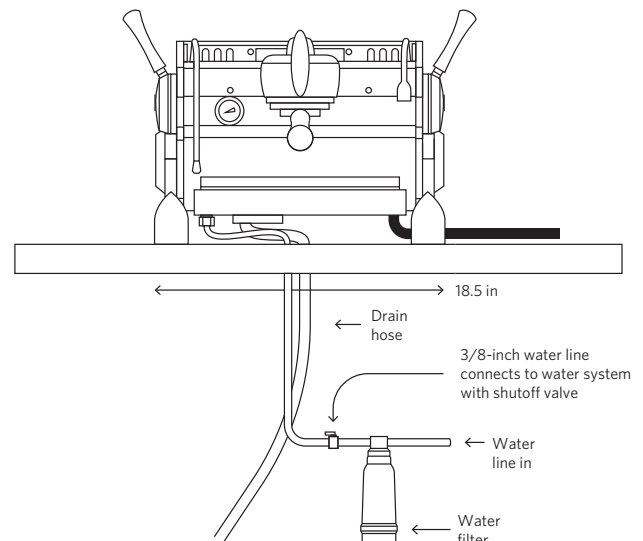

SLAYER
ESPRESSO MACHINES

ESPRESSO **SINGLE GROUP**